


roller door profiles | transparent

TranspaSafe

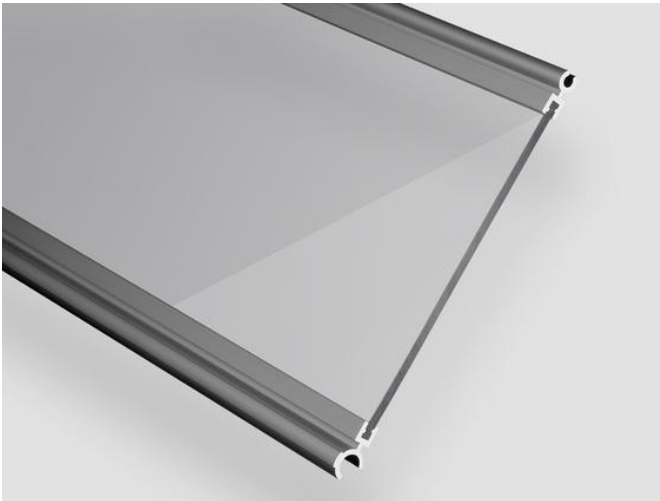

TranspaSafe

material	impact and scratch resistant polycarbonate / extruded aluminium profiles
thickness of material	6 mm
transparency rate	80
special	increased stability possible with integrated angles (TranspaSafe heavy version)
max. width [mm] (wind class 2)	7000 (division bars at width > 3.000 mm)
max. height [mm]	5000
max. surface [m ²]	30
weight per m ² [kg]	11
fitting guide rails	1.1371 and 1.1372 with PVC strips